



**Wholesale Doors**

*Cleary Millwork's*  
**COMMERCIAL  
DIVISION**

## THE PREMIER WHOLESALER DISTRIBUTOR OF

ARCHITECTURAL AND COMMERCIAL FLUSH WOOD DOORS,  
STILE AND RAIL WOOD DOORS, HOLLOW METAL DOORS AND FRAMES,  
INTERIOR ALUMINUM FRAMES, COMMERCIAL FIBERGLASS DOORS,  
COMMERCIAL PREHUNG UNITS, CONTRACT HARDWARE,  
TOILET PARTITIONS, WASHROOM ACCESSORIES, ACCESS PANELS.

  
*Cleary*  
MILLWORK

**Wholesale Doors**  
COMMERCIAL DIVISION

# ABOUT US

In 2017 Wholesale Doors joined Cleary Millwork to become Cleary's Commercial Division. Based out of Watertown, MA, Wholesale Doors was founded in 1953 on the premise of providing a service oriented, quick ship value. Wholesale Doors has evolved to being a recognized commercial supplier to contract hardware firms and lumber dealers in New England and New York.

The combination of Cleary Millwork and Wholesale Doors brings years of expertise on commercial and residential products, a greatly expanded in-stock inventory of products and the capacity to modify, machine, prehang and prefinish all types of doors.

As a premier wholesale distributor in the Northeast we take pride in our company and our customers in providing services and products that are unmatched by the competition.

We live by our mission statement "to provide exceptional products and services to every customer, every time".



## FORTRESS COATING SYSTEMS

Fortress Coating Systems™ provide a superior finish on many of our products. Utilizing premium coatings from industry leading suppliers, our prime, clear, stained or painted finishes provide optimum appearance and durability.

Our Watertown facility has an automated flat line that specializes in clear and stained finishes for commercial flush doors.

Our Somerset facility uses an automated spray line in a state-of-the-art cleanroom spray facility. This facility specializes in finishing steel & fiberglass doors, stile and rail doors, mouldings, and stair components.

**Fortress**  
COATING SYSTEMS™

# TABLE OF CONTENTS



<b>HOLLOW METAL DOORS</b>	<i>page 4-5</i>
<b>HOLLOW METAL FRAMES / OTHER FRAMES</b>	<i>page 6-8</i>
<b>ADJUSTABLE FRAMES</b>	<i>page 9</i>
<b>INTERIOR ALUMINUM FRAMES</b>	<i>page 10</i>
<b>ARCHITECTURAL FLUSH DOORS</b>	<i>page 11-12</i>
<b>COMMERCIAL FLUSH DOORS</b>	<i>page 13</i>
<b>LITES &amp; LOUVERS</b>	<i>page 14</i>
<b>FIRE RATED DOORS</b>	<i>page 15</i>
<b>STILE &amp; RAIL WOOD DOORS</b>	<i>page 16</i>
<b>MOLDED &amp; MDF DOORS</b>	<i>page 17</i>
<b>COMMERCIAL FIBERGLASS DOORS</b>	<i>page 18</i>
<b>PREFINISHING</b>	<i>page 18</i>
<b>HARDWARE</b>	<i>page 20-27</i>
<b>TOILET PARTITIONS / WASHROOM ACCESSORIES</b>	<i>page 28-29</i>
<b>ACCESS PANELS</b>	<i>page 30</i>
<b>CUSTOM MILLWORK</b>	<i>page 31</i>



**Wholesale Doors**

COMMERCIAL DIVISION

[WWW.CLEARYMILLWORK.COM](http://WWW.CLEARYMILLWORK.COM)

## Honeycomb doors



### Key features

- 1" (25.4 mm) Hexagonal Cell Kraft Paper Core
- Excellent Crushing Strength
- 1 3/4" Door Thickness Only
- Edge Seam Options
  - Lock Seam (PA) 18-gauge

### Performance

- PA 18: 500,000 cycles per ANSI A250.4
- STC 36 (operable rating with appropriate gasketing)

### Fire ratings

- Available up to 3 hours

### Standard features

- A40 galvanized material
- 16-gauge top and bottom welded inverted channel
- Both edges beveled 1/8" in 2"



Standard, lock seam on edge construction. Reinforced welded corners (PA).



Standard, inverted steel channels, projection welded 16-gauge (0.056"/1.4 mm) or 14-gauge



Cylindrical lock reinforcement 12-gauge (0.105"/2.7 mm) lock front, 18-gauge (0.044"/1.1 mm) spacer



Mortise lock reinforcement 12-gauge (0.105"/2.7 mm) lock front, 16-gauge (0.056"/1.4 mm) box



Flush bolt reinforcement 12-gauge (0.105"/2.7 mm) tabs



Standard ANSI 4 7/8" (123.8 mm) strike reinforcement 16-gauge (0.056"/1.4 mm)

## Polystyrene core



### Key features

- Interior and exterior usage
- Expanded polystyrene core
- 1 3/4" door thickness standard
- Edge Seam Options
  - Lock seam (PA) 18 or 16-gauge
- R-Factor (metric values in parentheses)
  - ASTM C518: R7.03 (R1.24)
  - ASTM C1363: R2.44 (R0.43)
  - NFRC 102: R2.63 (R0.46)

### Performance

- PA18: 1,000,000 cycles per ANSI A250.4

### Fire ratings

- Available up to 1-1/2 hours.

### Standard features

- A40 galvanized material
- 16-gauge top and bottom welded inverted channel



Standard, inverted steel channels, projection welded 16-gauge (0.056"/1.4 mm) or 14-gauge




Standard, lock seam on edge construction. Reinforced welded corners (PA).

# HOLLOW METAL DOORS

## Lite kits and louvers sectional details

Louvers sold as is. Installed in doors below in non fire rated or fire rated.

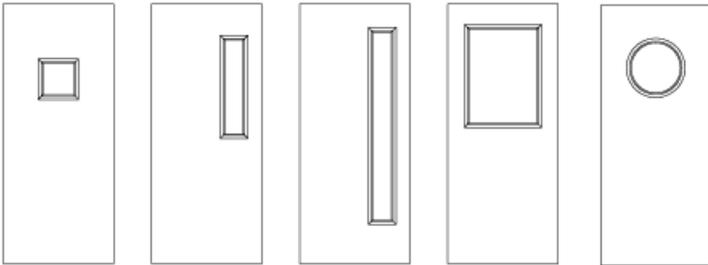


Type G      Type NL      Type NL-FG      Type HG      Type Round

*Lite kits installed in doors to the left*



Type G      Type round      Type L      Type FL

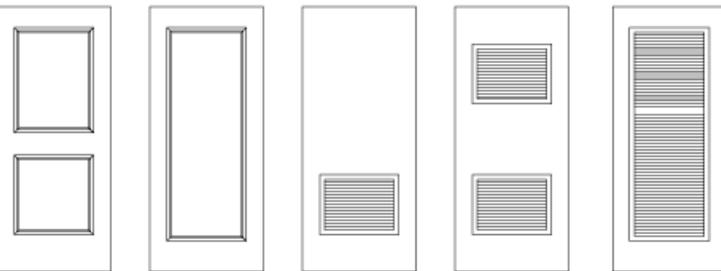

Type 2XHG      Type FG      Type L      Type 2XL      Type FL

### Non fire rated


- 1/4" Clear tempered
- 1/4" Clear laminated safety
- 5/8" Clear tempered insulated (1/4" thick Acid Etched can be used in insulated glass)

### Fire rated

- 1/4" Safety rated wire glass
- 3/16" Clear ceramic pyran


## Additional door products available from De La Fontaine

### Doors with Recessed Panels

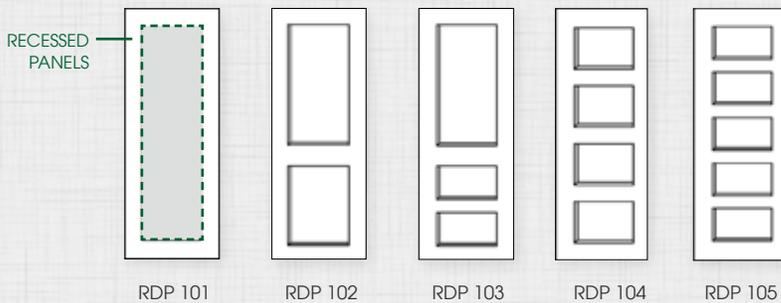



RDP 101      RDP 102      RDP 103      RDP 104      RDP 105

### Doors with Inlays

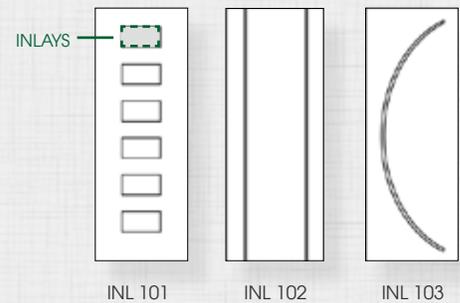


INL 101      INL 102      INL 103

### Doors with Custom Embossing

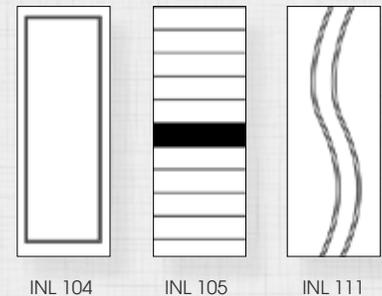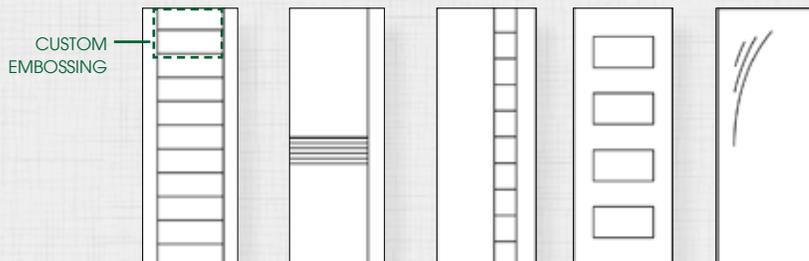

INL 104      INL 105      INL 111

## Masonry

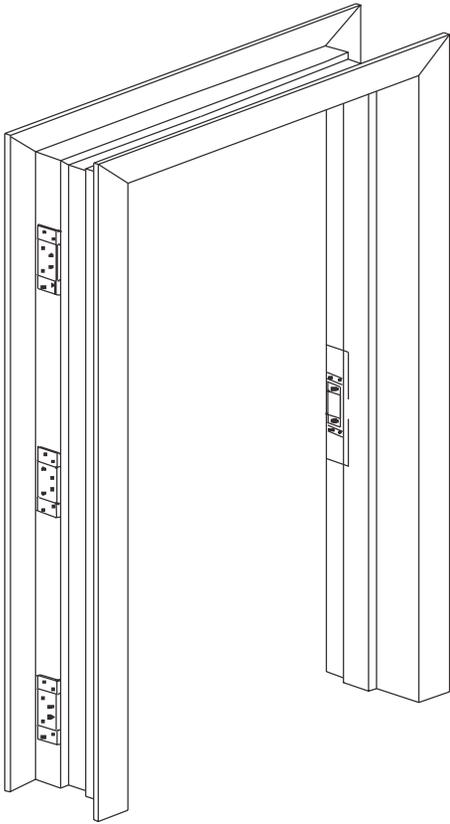

### Standard frame anchors

DE LA FONTAINE standard anchors are designed for use in almost any job conditions. Custom anchors available.



"T" masonry anchor (TMA) with floor anchor, shipped loose



Wire masonry anchor (WMA), shipped loose



Existing wall anchor (EWA) with reinforcement, welded



Steel stud "Z" bracket anchor (ZBA), welded




Multi-purpose wood or steel stud anchor (SWS)

### Designed to be installed in masonry wall conditions

- Available knock-down (KD)
- Face welded assembly
- Solid three-sided frame application
- Welded floor anchor and mortar guard on hinge reinforcement are standard on welded frames
- Fire rating: Up to 3 hours (ITS/WHI) fire label

### Standard features

- A40 galvanized steel
- 16-gauge steel

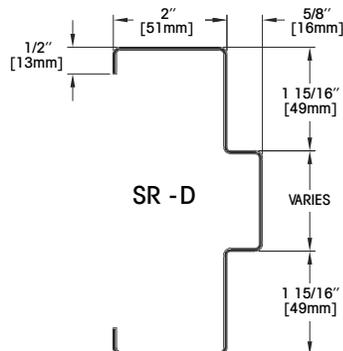

### Standard frame hardware reinforcements




ANSI 4-7/8" strike reinforcement (16-gauge)




Standard (03134") or heavyweight (0.180") hinge reinforcement (10-gauge)

### Masonry rough opening



Door width + 4-1/4"  
Door height + 2-1/8" for 2" head  
Door height + 4-1/8" for 4" head

## Drywall

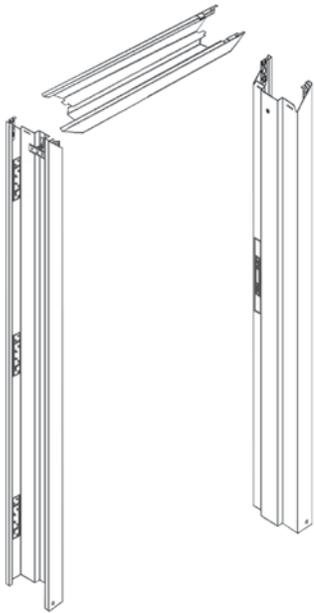

### DW series drywall frame

Other sizes and profiles available special order.



Screw base anchor (SBA)



Knock-down (KD) assembly with tabs and compression anchor



Steel stud "Z" bracket anchor (ZBA), welded



Multi-purpose wood or steel stud anchor (SWS)




Existing wall anchor (EWA) with reinforcement welded

### Designed to be installed after the wall is up (slip-on 3-piece frame)


- Three-sided frame for drywall applications
- KD assembly
- Compression anchor (leveling screw) on each jamb for plumbness and level
- Punched and dimpled on frame face for No.6 drywall screw (standard)
- Drywall strap anchors (optional)
- Fire rating: Up to 3 hours (ITS/WHI) fire label

### Standard features


- A40 galvanized steel
- 16-gauge steel

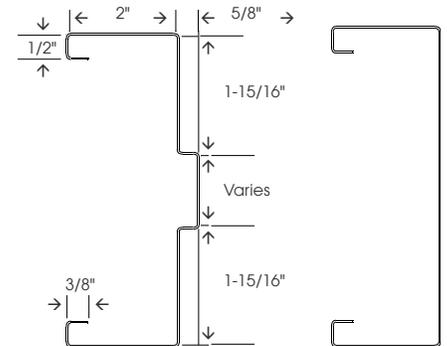


## Typical elevations - Common welded frame assemblies




Elev A1 up to 4/4 x 4/4  
Elev A2 up to 6/4 x 4/4




Elev B up to 6/4 x 4/4

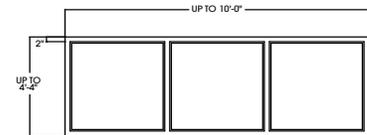


Elev C up to 10/0 x 4/4



Elev D1 up to 6/4 x 7/2 or 6/10  
Elev D2 up to 10/0 x 7/2 or 6/10  
6/8 or 7/0 door opening height




Elev E up to 10/0 x 7/2 or 6/10  
6/8 or 7/0 door opening height



Elev F1 up to 6/0 x 7/2 or 6/10  
Elev F2 up to 10/0 x 7/2 or 6/10  
6/8 or 7/0 door opening height


## Other frame products available from De La Fontaine



Segmented radius borrowed lite



Wood trim prep



TRUE-radius borrowed lite



Split frame wrapping steel stud with drywall



Elevations - Arched Frame



## Other profiles available



Single rabbet profile



Centered glass profile



Caulking Groove profile



Radius profile



Sloped sill profile



Double stepped ogee profile



Shadow line profile

## Additional frame products available on factory order

### Profiles

- Less return frame with wood trim prep
- Split frame
- Other custom profiles

### Elevations

- Segmented Radius Borrowed Lite
- True Radius Borrowed Lite
- Arched Frame Elevations

### Materials

- A60 Galvanneal
- G90 Galvanized
- 304 & 306 Stainless Steel #4 Finish
- Factory Primed Product
- Factory Powdercoat Prefinish

## Rediflex adjustable 18 gauge steel frame with steelcraft locations

### Standard unit

- 90 minute fire rating (pairs 60 minute)
- Steelcraft locations
- 4-1/2" hinge preps
- Primed gray
- ASA strike prep or blank strike
- 40-5/16 from bottom to lock bore
- 18 gauge frame (including closure piece)
- 10 gauge hinge reinforcement
- Weatherstripping
- Dead bolt strike prep with cover
- Dead bolt prepped at 7-11/16" on center
- Prepped for wood or metal casing
- Available with blank strike jamb
- Smooth slide system
- Installation time greatly reduced
- Quality Rediframe design

### Wall thickness

6/8 and 7/0 height - 4-1/2" to 9-1/2"


### Notice

Bore and lock locations at commercial height, do not line up well with typical lock rail locations on molded doors



## Fastframe adjustable 20 gauge frame with Masonite locations (prehung)

For use with Masonite 1-3/4" steel Doors below. Prehang a 20, 60, or 90 minute single door up to 3/0 x 6/8 or 7/0 in Fastframe.

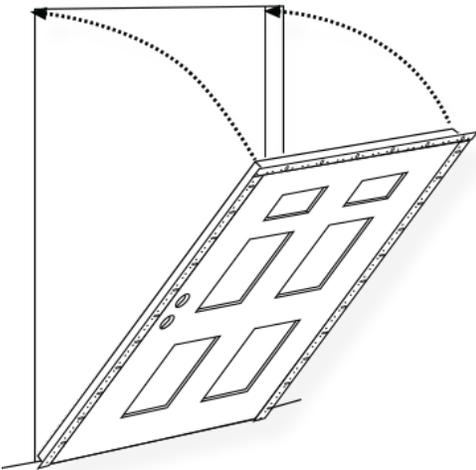

### Rough opening

- Door size + 1-1/4" width, 1" height - ADA sill
- Door size + 1-1/4" width, 1-1/2" height - high dam sill


### Kerf adjustable steel frame standard unit includes

- Frame: 4-1/2" - 5-1/2" kerfed adjustable steel 90 minute
- Hinges: 1-1/2 Pair 4 x 4 satin brass spring hinges
- Bore: Specify single bore (2-3/8" or 2-3/4" backset)  
Extender kit, white weatherstrip and hardware shipped loose



### 1-3/4" Steel doors


Doors in stock up to 3/0 x 7/0. 90 minute fire door entry system hung in steel frame.




Flush 90R




Flush 1090R




Flush 590R




6 Panel 90R



4 panel New England 90R



2 panel Camber-top



2 panel Square-top

## Frameworks frames, borrowed lites & mulls

Type II Frame System is a modular system that was developed for greater versatility and strength, and easier installation. It features snap-on trim that conceals the fasteners and provides clean design lines. Type II Framing is installed after the walls are finished and painted, which exempts it from critical path scheduling and makes it the ideal choice for design build or fast-track fit-out projects. Type II System accommodates 1/4", 3/8" and 1/2" glazing.



### Interior aluminum frames

3-3/4" and 4-7/8" available stock sizes 3/0 single, 6/0 doubles, 7/0, 8/0, 9/0 heights complete frames

#### Complete frames

- Boxed - clear anodized
- 4-1/2" Hinge preps - ASA strike prep
- 1-1/2" Square trim
- Stocked in Steelcraft, Ceco, Curries, Pioneer
- Hardware locations - custom frame can be prepped in our shop
- Felt stripping
- Clip kit


### Type II frame system

- Face profile: 1-1/2" std or 2" available
- Return: 9/32"
- Wall thickness: .07"
- Throat sizes: In-stock: 3-3/4", and 4-7/8"  
Non-stock: 3-1/2", 4-5/8", 5-1/4", 5-1/2", 6-1/8", and 7-1/4"




Type II frame system

### Borrowed lites

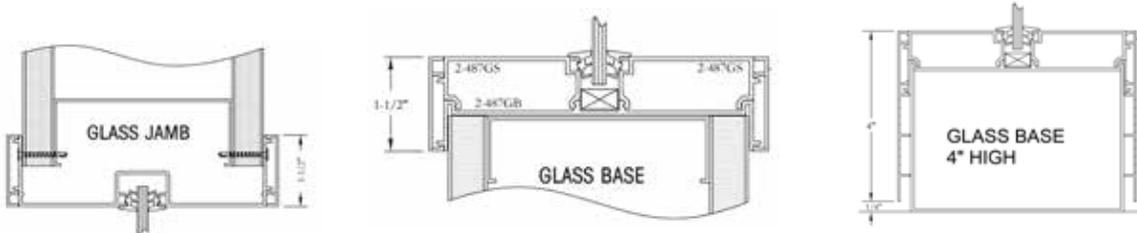

### Full height borrowed lites

1-1/2" base, includes 1-1/2" trim

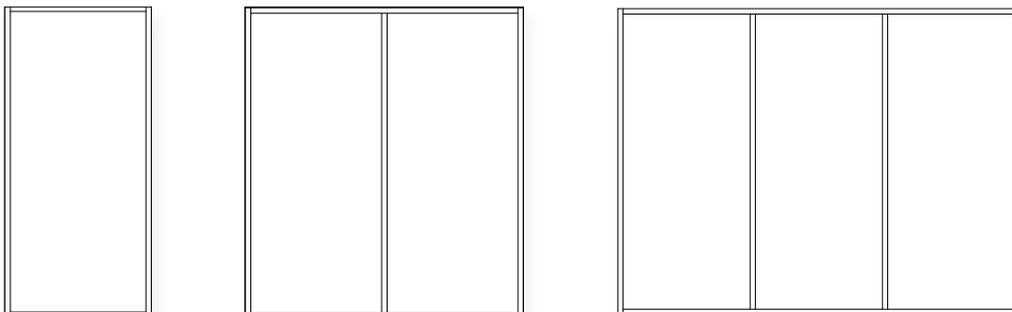

## Architectural flush wood doors

### Architectural Flush Wood Doors in Stock

- Matching edge
- Bonded core construction
- Hot pressed faces, 1/50" veneer thickness
- Meet WDMA I.S-1A premium grade
- Face veneers meet WDMA "A" grade ("AA" grade available on special factory order)
- Limited lifetime warranty
- Doors are built to meet or exceed industry performance requirements



Heavy Duty Particle Core (PC)											
Stock Veneers (Book and Running Match unless noted) Other veneers and configurations available on special factory order											
PARTICLE CORE	ROTARY CUT WHITE BIRCH	ROTARY CUT NATURAL BIRCH	PLAIN SLICED WHITE BIRCH	PLAIN SLICED RED OAK	PLAIN SLICED WHITE OAK	RIFT CUT RED OAK	PLAIN SLICED WHITE MAPLE	PLAIN SLICED CHERRY	FLAT CUT AFRICAN MAHOAGANY	PLAIN SLICED WALNUT	PRIMED MDO
3-0 X 6-8	X			X							
2-0 X 7-0	X, Y			X			X		X		
2-6 X 7-0	X, Y			X	X		X	X	X		
2-8 X 7-0	X			X			X	X	X		X
3-0 X 7-0	X, Y	X	X	X, Y	X	X	X, Y	X, Y	X, Y	X	X
3-6 X 7-0	X			X			X	X			X
3-8 X 7-0	X			X							
4-0 X 7-0	X			X			X	X	X		
2-0 X 8-0	X			X							
2-6 X 8-0	X			X							
3-0 X 8-0	X, Y			X, Y	X	X	X, Y	X, Y	X, Y	X	
3-6 X 8-0	X			X							
4-0 X 8-0	X			X			X				
3-0 X 9-0	X	X	X	X	X		X, Y	X, Y	X, Y		
4-0 X 9-0	X	X	X	X		X	X	X	X		

X= STANDARD DOOR

Y = TRUE PAIR MATCHED DOOR



Extra Heavy Duty Structural Composite Lumber Core (SCL) *retains warranty with full lite cutout						
Stock Veneers (Book and Running Match unless noted) Other veneers and configurations available on special factory order						
	ROTARY CUT WHITE BIRCH	PLAIN SLICED RED OAK	PLAIN SLICED WHITE MAPLE	PLAIN SLICED CHERRY	FLAT CUT AFRICAN MAHOAGANY	PLAIN SLICED WHITE BIRCH
3-0 x 7-0	J, K	J, K	J, K	J, K	J, K	J, K
4-0 x 7-0	J, K	J, K	J, K			
3-0 x 9-0	J	J	J	J	J	J

J= STANDARD DOOR

K= SCL CORE - CAN BE 45 MINUTE FIRE RATED - SINGLE DOOR ONLY

**Doors Can be machined, prefinished (stain or paint), re-sized, glazed, prehung in our shop**

## Architectural flush wood doors



### Fire rated doors

Fire Protective Mineral Core (MC) - 45-90 Minute Fire Rating. Mineral Core Doors can be Neutral pressure or Category B Positive Pressue Specialty Sound Rated Core - STC41 (includes gasketing and door bottom) Lead Lined Core - 1/16" Lead										
Stock Veneers (Book and Running Match unless noted) Other veneers and configurations available on special factory order										
	ROTARY CUT WHITE BIRCH	ROTARY CUT NATURAL BIRCH	PLAIN SLICED WHITE BIRCH	PLAIN SLICED RED OAK	PLAIN SLICED WHITE OAK	RIFT CUT RED OAK	PLAIN SLICED WHITE MAPLE	PLAIN SLICED CHERRY	FLAT CUT AFRICAN MAHOAGANY	PRIMED MDO
2-0 x 6-8		A								
2-4 x 6-8		A								
2-6 x 6-8		A								
2-8 x 6-8		A								
2-10 x 6-8		A								
3-0 x 6-8	A, B, C	A, B, C		A, C						
3-6 x 6-8	C	A		C						
3-8 x 6-8	C	A								
4-0 x 6-8	C	A								
2-0 x 7-0	A	A		A						
2-6 x 7-0	A	A		A						
2-8 x 7-0		A		A						
2-10 x 7-0		A		A						
3-0 x 7-0	A, B, C	A, B, C	C	A, B, C	C	C	A, B, C	A, B, C	A, C	
3-4 x 7-0		A								
3-6 x 7-0	C	A		C						
3-8 x 7-0	C	A		C						
4-0 x 7-0	C	A		C			C		C	
3-0 x 8-0	C	A		C	C		A, B, C	B, C	B, C	
4-0 x 8-0							C	C	C	
3-0 x 9-0	C			C						
4-0 x 9-0	C			C		C				

A= STANDARD DOOR

B=TRUE PAIR

C= STANDARD DOOR - CLOSER BLOCKED

## Commercial flush wood doors

### Commercial Flush Wood Doors in Stock

- Economical alternative to architectural grade doors
  - Natural & White Birch commercial doors have compatible aspen edges
  - Red Oak commercial doors are matching edge
  - Bonded Core Construction
- Economy Flush Wood Doors in Stock
- Natural Birch doors have veneered edges
  - Natural Birch Doors are stocked in unfinished and clear prefinished
  - Hardboard doors are primed
  - Non bonded construction



PARTICLE CORE	COMMERCIAL NATURAL BIRCH	COMMERCIAL WHITE BIRCH	COMMERCIAL RED OAK	ECONOMY NATURAL BIRCH	ECONOMY NATURAL BIRCH CLEAR PF	PRIMED HARDBOARD
1-0 x 6-8	X					
1-3 x 6-8	X					
1-6 x 6-8	X					
2-0 x 6-8	X		X	X	X	
2-2 x 6-8	X					
2-4 x 6-8	X					
2-6 x 6-8	X		X	X	X	X
2-8 x 6-8	X			X	X	X
2-10 x 6-8	X					
3-0 x 6-8	X, Y	X	X	X	X	X
3-4 x 6-8	X					
3-6 x 6-8	X		X			
3-8 x 6-8	X					
4-0 x 6-8	X					
1-0 x 7-0	X					
1-3 x 7-0	X					
1-6 x 7-0	X					
2-0 x 7-0	X	X	X	X	X	X
2-2 x 7-0	X					
2-4 x 7-0	X		X			
2-6 x 7-0	X	X	X	X	X	X
2-8 x 7-0	X	X	X	X	X	X
2-10 x 7-0	X	X	X			X
3-0 x 7-0	X, Y	X	X	X	X	X
3-4 x 7-0	X					
3-6 x 7-0	X	X	X			X
3-8 x 7-0	X	X				
4-0 x 7-0	X	X	X			X
2-0 x 8-0	X					
2-6 x 8-0	X					
3-0 x 8-0	X	X				X
3-6 x 8-0	X					X
4-0 x 8-0	X					X
3-0 x 9-0						X

Y=TRUE PAIR MATCHED DOOR

X= STANDARD DOOR

### Fire rated doors

Fire Protective Mineral Core (MC) - 45-90 Minute Fire Rating. Mineral Core Doors can be Neutral pressure or Category B Positive Pressure


MINERAL CORE	COMMERCIAL WHITE BIRCH	PRIMED HARDBOARD
3-0 x 6-8	X, Y	X
3-0 x 7-0	X, Y	X

X= STANDARD DOOR

Y= TRUE PAIR MATCHED DOOR

# LITES AND LOUVERS

## Metal lites and louvers for flush doors

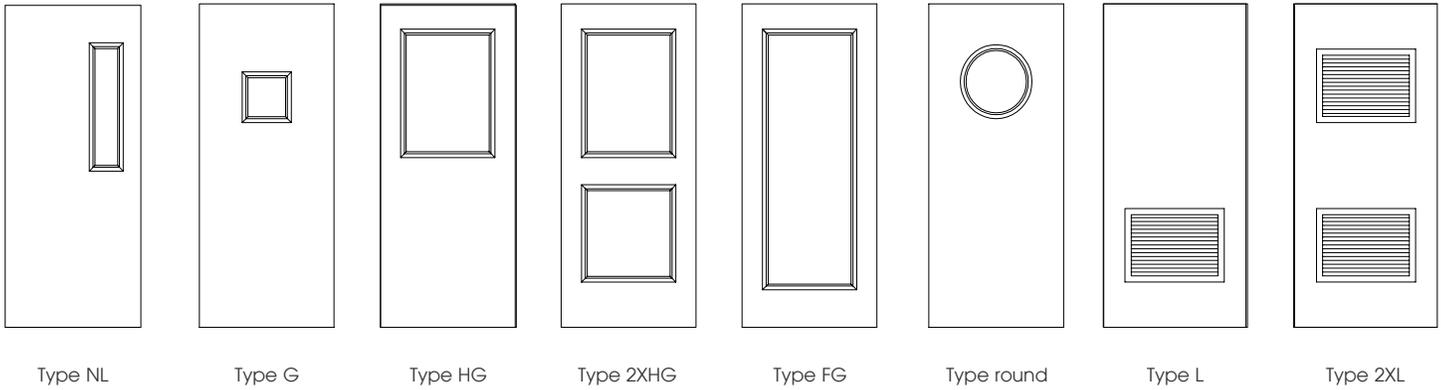


Door type, door size, glass type, hardware configuration all contribute to available fire rating. Please consult your Cleary/ Wholesale Doors sales team for details. When ordering metal vision panels and louvers, please make sure to specify: Top rail (top of door to top of cutout), lock stile dimension (edge of door to edge of cutout) or specify center in door width.

## Hand beaded lites flush wood bead, lip wood bead & veneered fire rated bead


PERIMETER INCH GUIDE:	
CUTOUT SIZE	PERIMETER INCH
5 X 20	50
24 x 30	108
24 x 62	172

When ordering custom hand beaded lites, please make sure to specify:

- Cutout size (width x height)
- Top Rail (top of door to cutout)
- Lock Stile (lock edge of door to cutout) or specify center cutout in door

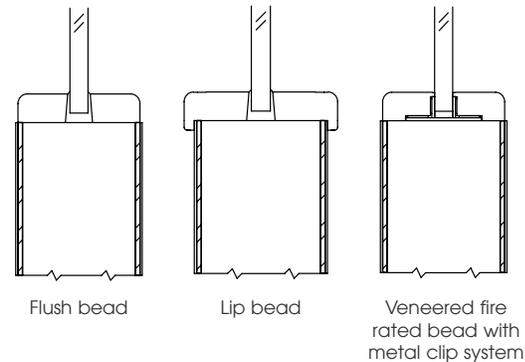

## Metal lites and louvers - Technical drawings

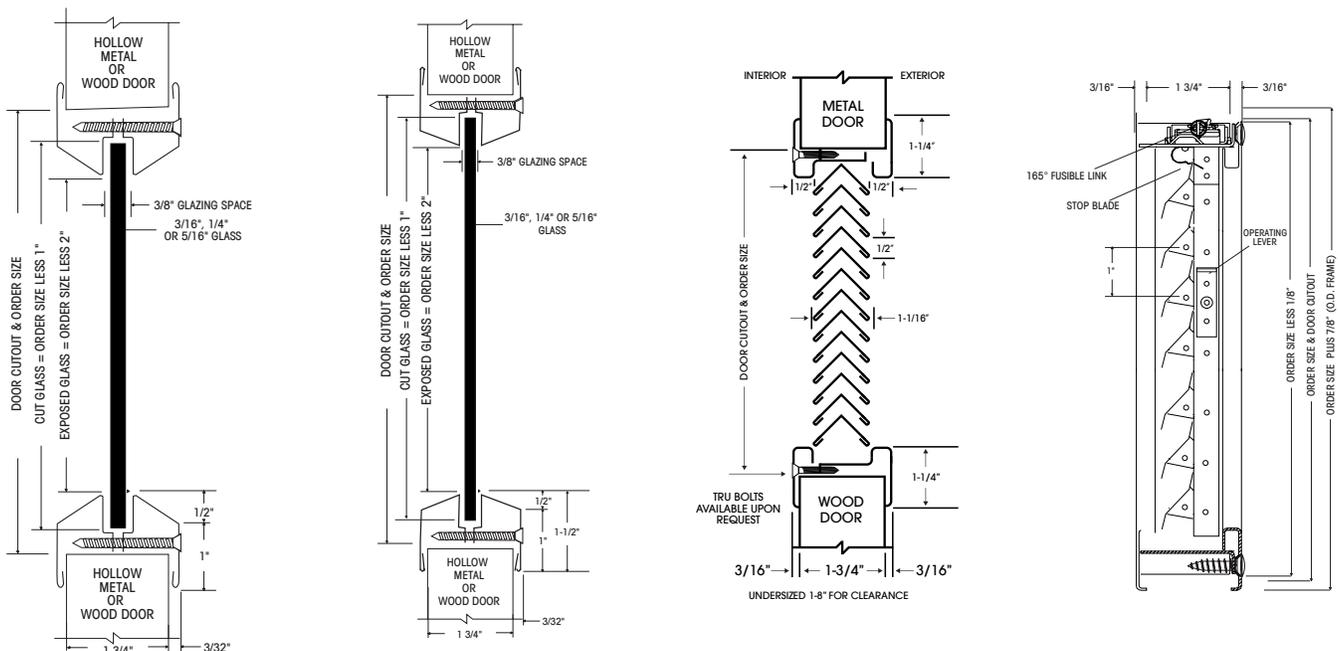

## Captiva fire-rated door specifications, jambs and cross sections

Captiva Fire-rated wood door frames allow builders and architects to comply with the strictest building code requirements without sacrificing the design integrity of the project. A fire-resistant core is wrapped with wood veneers to perfectly match the non-rated door frames throughout the project. Captiva fire-rated door frames are available in the wood species of your choice in stain grade, paint grade and prefinished. Our frames come standard with a patented adjustable clip system for fast and simple installation.

### Architectural consistency

Whether residential or commercial applications, Captiva fire-rated doors allow you to seamlessly match the Captiva non-rated doors throughout your project. Hundreds of panel door designs and many glass door designs (some restrictions on size) are available fire-rated.




Intumescent edging  
Double rabbet, 90 minute, with clips  
(clip removed and clips attached)

### Fire-rated door specifications

- 20, 45, 60 and 90 minute door and jamb ratings
- 1-3/4" and 2-1/4" door thickness available
- Flat or rabbeted jambs
- Metal jambs available for all ratings
- All fire doors and jambs available stain grade, paint grade or prefinished
- Available with flat or raised panels
- All standard sticking and panel profile designs available
- Certified through Interek Testing Service

20 minute fire-rated door cross section

45-60-90 minute fire-rated door cross section



Intumescent edging

Intumescent edging



Single rabbet  
60 minute



Double rabbet  
60 minute



Single rabbet  
90 minute



Double rabbet  
90 minute

## Captiva custom wood doors



Handcrafted in New England, which is synonymous with "Old World" traditions and fine, detail-oriented architecture, Captiva Wood Doors are built to your specifications. Creating a fusion of traditional wood working techniques and technology, Captiva Wood Doors offer thousands of possibilities.

Artistic consciousness with the look and feel of quality is easy to recognize on our doors. We offer stave core construction, premium thickness, veneers, traditional stile and rail construction, and superior panel design, as well as a choice between mortise and tenon and our very own "beaded tenon". All pieces are hand fit together with the industry's finest adhesives on all connections.

*Captiva custom wood doors made in Somerset, MA in our state-of-the-art manufacturing facility. View the Captiva catalog for more information.*



[www.captivawooddoors.com](http://www.captivawooddoors.com)

**QUOTE TOOL  
COMING SOON!**

## Rogue Valley beaded doors, sidelites and transoms

Available prehung and machined.



412-V Fir  
Beaded Panel



4661-VA Fir  
Beaded Panel



V982-V Fir  
Beaded Panel



4661-V Fir  
Beaded Panel



4310  
Fir



4130  
Pine



4044  
Fir



4020  
Fir



4134  
Fir



4132  
Fir



4661SL-V  
Fir Sidelite  
Beaded Panel



4704SL-V  
Fir Sidelite  
Beaded Panel



6703 - 3'0 Rectangle  
Fir



6705 - 3'0 Rectangle  
Fir



**Rogue PDQ**  
Price Design Quota

## Rogue Valley traditional & french doors and sidelites



4144 Fir



4662 Fir



4944 Fir



4501 Fir



1501  
Fir and Pine



1515  
Fir and Pine



412 Fir



4701SL  
Fir



4703SL  
Fir




4705SL  
Fir

# MOLDED & MDF DOORS


## 1-3/4" Solid core molded doors

Doors in-stock from 2/6 x 6/8 - 2/6 x 7/0.

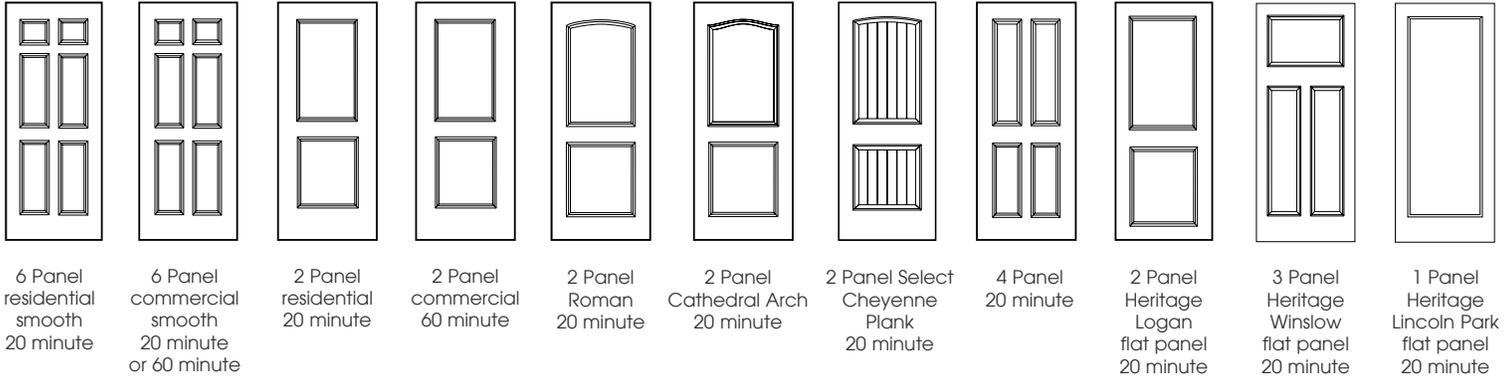



## 1-3/8" Molded doors

Doors in-stock from 6/8 x 7/0 - 6/8 x 8/0.

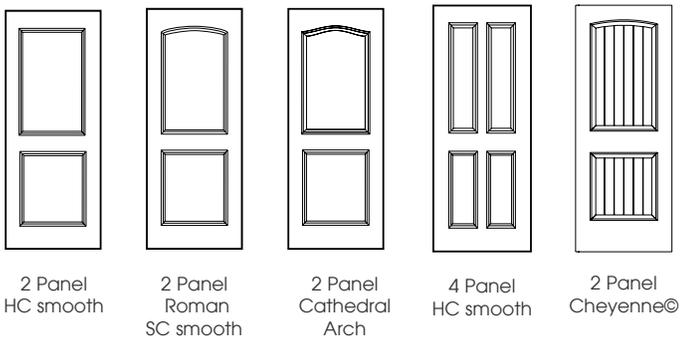

## 1-3/8" & 1-3/4" MDF doors


Doors in-stock 6/8, 7/0, 8/0

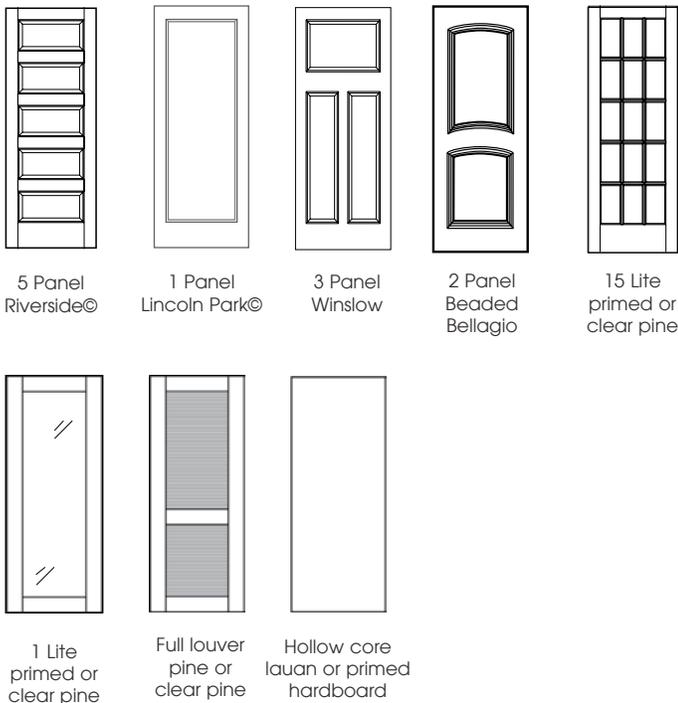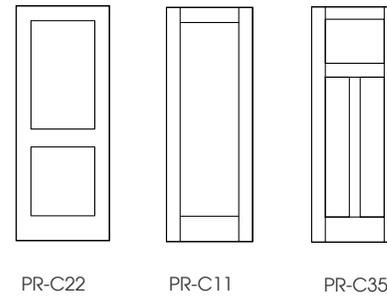

# FIBERGLASS DOORS

## Commercial fiberglass doors

Doors in stock from 2/6 x 6/8 - 3/0 x 7/0.

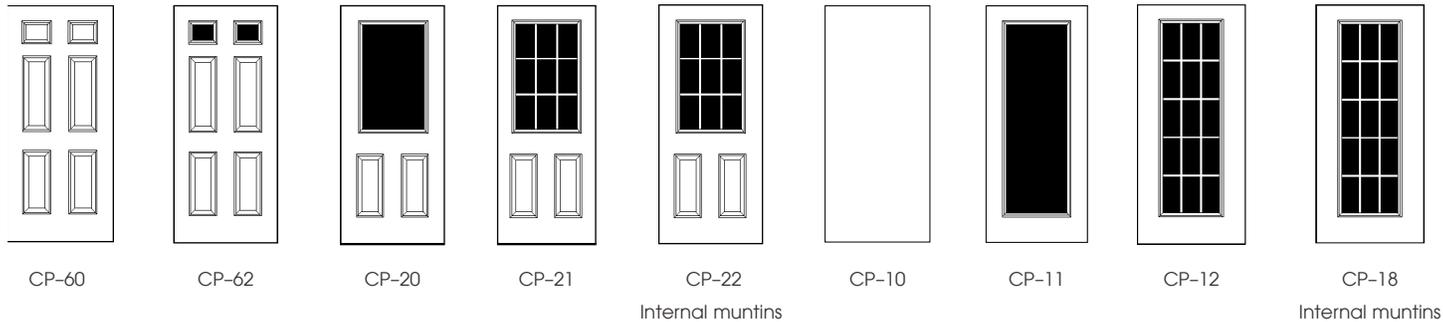


## Machine fiberglass door for De La Fontaine frame

Other metal frame mfg. composite or wood jamb

**Image shown below:**


7/0 structure with double closure block and panic bar

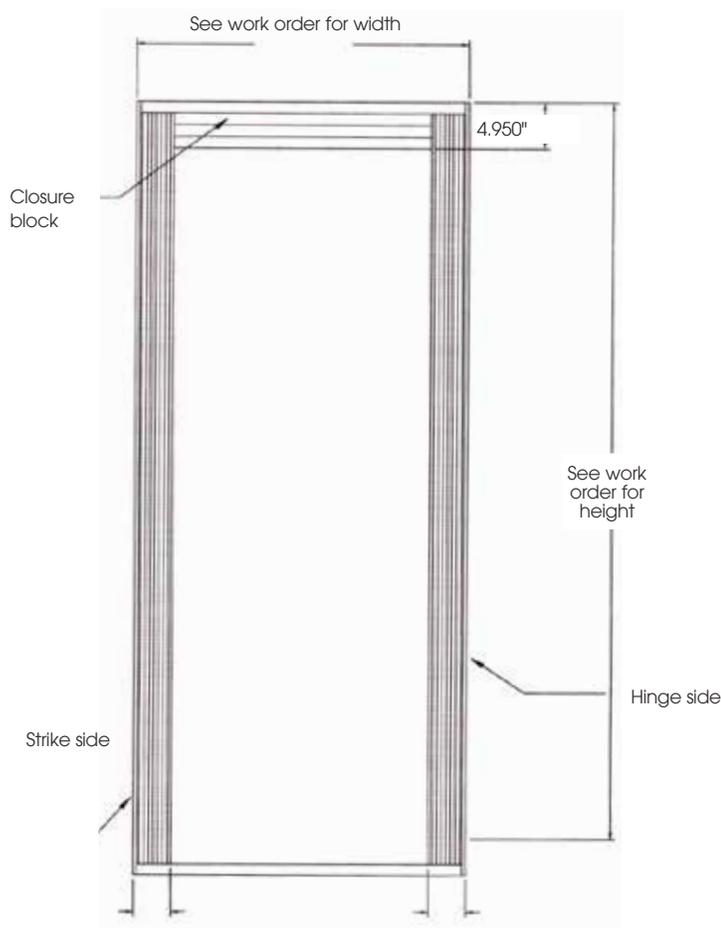

## Sidelites

Align with commercial fiberglass doors above.


In stock from 1/0 x 6/8 - 1/2 x 7/0.

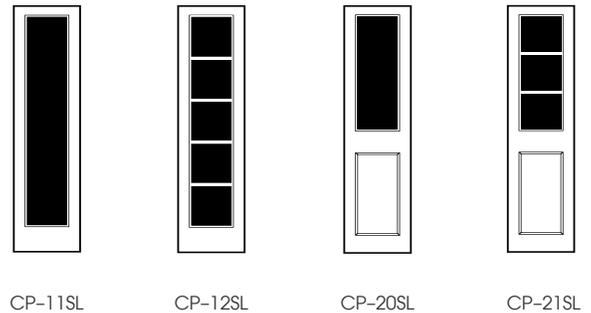

## Flush bead glaze

In stock from 3/0 x 6/8 - 3/0 x 8/0.

SDL's available for flush glazed and lplight frames

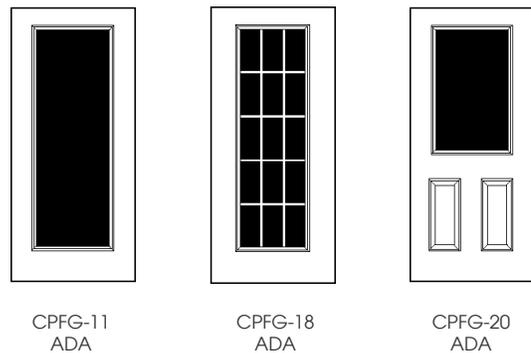

- PVC SDL's are available in a wide range of configurations. Call for pricing.
- Flush bead doors stocked open (without glass) for your choice of glass type/layout.
- 5/8" insulated glass blocked for commercial hardware  
\*\* ADA Compliant bottom rail 10-1/2"

## Fortress coating systems™

Fortress Coating Systems™ provide a superior finish on many of our products. Utilizing premium coatings from industry leading suppliers, our prime, clear, stained or painted finishes provide optimum appearance and durability.

Our Watertown facility has an automated flat line that specializes in clear and stained finishes for commercial flush doors.

Our Somerset facility uses an automated spray line in a state-of-the-art cleanroom spray facility. This facility specializes in finishing steel & fiberglass doors, stile and rail doors, mouldings, and stair components.

- Custom colors available: Please supply Sherwin Williams paint # or Benjamin Moore paint #
- Colors vary due to printing. Confirm your choice. See color cards for samples
- Fortress stain colors do not match DIY Fortress stain kits.
- Double door includes painting interior and exterior of astragal (stained doors standard with bronze astragal)

### Stock colors



## Commercial grade hinges



Standard weight plain bearing	Standard weight ball Bearing	Standard weight ball bearing nrp	Heavy weight ball bearing	Surface ball bearing	Standard weight ball bearing	2 Spring 1/bb set
4-1/2" x 4-1/2" Available in US26D	4-1/2" x 4-1/2" Available in US26D, US15, US26, US10B, US10, US4, US3, USP	4-1/2" x 4-1/2" Available in US26D, US10B, US4, US3, US32D, USP	4-1/2" x 4-1/2" Available in US26D, US32D	4-1/2" 1/2 PAIR Available in US26D, USP	4" x 4" Available in US26D	4-1/2" x 4-1/2" Available in US26D, US15, US10B, US4, US3, USP

### Finishes








US26D	US15	US26	US10B	US10	US4	US3	US32D	USP
Dull chrome	Satin nickel	Bright chrome	Oil rubbed bronze	Dull bronze	Dull brass	Bright brass	Satin stainless steel	Primed

## Continuous hinges



- Individually cartoned with fasteners & instructions.
- One hinge per door panel
- UL listed up to 90 minute door
- Standard duty for medium frequency doors up to 200 lbs
- Heavy duty for high frequency or doors over 200 lbs.

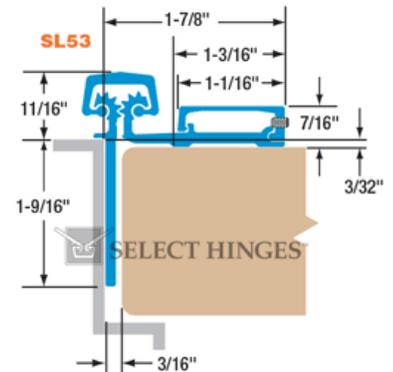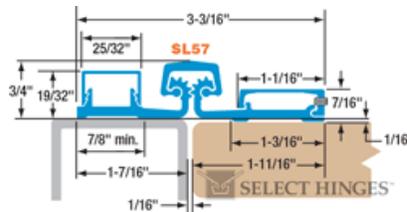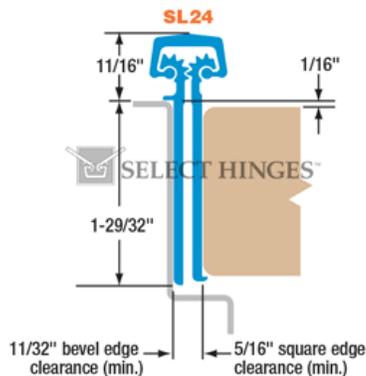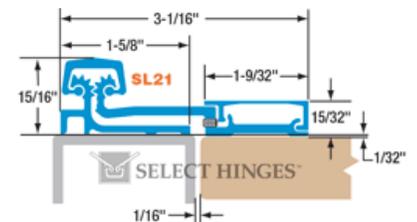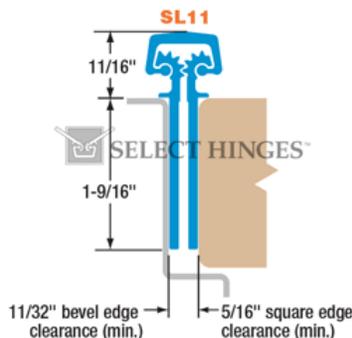

## Commercial grade locksets



Standard duty commercial series

- Withnell lever design
- 2-3/4 Backset (2-3/8 available)
- Non-handed
- Schlage "C" keyway 6 pin cylinder - 5 pin keyed
- ASA strike
- Small format interchangeable core available
- 1 Year warranty



Extra heavy duty commercial series

- Industrial series
- Withnell lever design
- 2-3/4 Backset (2-3/8 available)
- Non-handed
- Schlage "C" keyway 6 pin cylinder - 5 pin keyed
- Small format interchangeable core available (Factory quick-ship)
- ASA Strike
- Lifetime warranty



Standard duty

- Commercial series 2-3/4 backset
- Non-handed
- Schlage "C" keyway 6 pin cylinder - 5 pin keyed
- 2-3/4 deadbolt strike
- Lifetime warranty




Extra heavy duty

- Commercial series 2-3/4 backset
- Non-handed
- Schlage "C" keyway 6 pin cylinder - 5 pin keyed
- 2-3/4 deadbolt strike
- Lifetime warranty

## Exit devices

### Standard duty

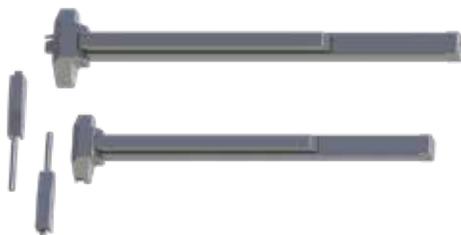

Standard Duty Commercial Series

- Rim fire-rated device - rated up to 3 hour
- Surface vertical rod device - rated up to 1-1/2 hour
- UL10C, UL10B, UL305 listed
- Complies with ANSI 117.1
- Five year warranty



Standard duty, commercial series



Standard duty exit device parts

- Withnell lever design
- Non-Handed
- Schlage "C" Keyway 6 pin cylinder - 5 pin keyed or small format IC prep (core separate)

### Heavy duty



Grade 1 heavy duty commercial series

- Fire-rated device - rated up to 3 hour
- UL10C, UL10B, UL305 listed
- Complies with ANSI 117.1
- Lifetime warranty



Grade 1 heavy duty, commercial series



Heavy duty exit device parts

- Withnell lever design
- Non-Handed
- Cylinder supplied loose when requested

## Locksets

NON-KEYED	FUNCTION	FUNCTION No.		FUNCTION DESCRIPTION	ANSI No.
	Passage	GRADE 1 3410	GRADE 2 2510	Latchbolt operated by lever from either side at all times	F75
	Dummy - single	GRADE 1 3417	GRADE 2 2517	Pull one side, no mechanical operation	-
	Privacy	GRADE 1 2540	GRADE 2 2540	Latchbolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by emergency release outside, operating inside lever or closing door.	F76A
KEYED					
	Entry	GRADE 1 3453	GRADE 2 2553	Deadlocking latchbolt by lever either side, except when turn button inside locks outside lever. Pushing turn button in locks outside lever, requiring use of key outside to unlock. Turning inside lever unlocks outside lever. Pushing in and turning button locks outside lever, requiring key at all times. Turning inside lever does not unlock outside lever until button is manually turned to unlocked position. Inside lever always free.	F109
	Classroom	GRADE 1 3470	GRADE 2 2570	Deadlocking latchbolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked, latchbolt is operated by inside lever.	F84
	Storeroom	GRADE 1 3480	GRADE 2 2580	Deadlocking latchbolt operated by key in outside lever, or by operating inside lever. Outside lever is always locked. Inside lever is always unlocked.	F86
	Cylinder x Thumbturn	GRADE 1 3115	GRADE 2 3215	Deadbolt thrown or retracted by key from outside or by inside thumbturn. Bolt automatically deadlocks when fully thrown.	E2152

## Flushbolts



281D

Corner mount  
flushbolts light duty



282D

12" & 24"  
Extension flushbolt



283D

Corner flushbolt



292D

Automatic flushbolt



291D

Automatic flushbolt

## Hager door closers



Grade 1 5100 series door closer  
- painted finish

- Cast iron body
- Full plastic cover
- Adjustable sizes 1-6
- Tri-pack is regular, top jamb, parallel arm mount
- Include SNB fasteners
- Plated finishes available factory order



Grade 1 5200 series door closers  
- painted finish

- Aluminum alloy body
- Slim plastic cover
- Adjustable sizes 1-6
- Tri-pack is regular, top jamb, parallel arm mount
- Extra heavy duty stop arm. Friction hold open arm in-stock
- Include SNB fasteners
- Plated finished available factory order



Grade 1 5300 series door closers  
- painted finish

- Aluminum alloy body
- Full plastic cover
- Adjustable sizes 1-6
- Tri-pack is regular, top jamb, parallel arm mount
- Include SNB fasteners

## Misc flatgood / accessories



Push plate  
3-1/2" x 15"



Kick plate  
8" x 30" - 8" x 34" - 10" x 34"



Pocket door latch



Door viewer  
• UL Rated  
9/16" hole  
wide angle



Door stop



Chain Stop  
• 25-1/2"



Door bolt

## Rescue hardware



Double acting pivots



Double lipped strike



Emergency stop



Mortise locksets



Interconnected locksets



Tubular locksets



Electric strike



Fob readers & systems



Electric-magnetic door holders



Overhead stops / holders



Magnetic locks




Low energy door operators


## Additional products

## Brush weatherstripping and aluminum sills


Closer includes hardware pack for regular arm, top jamb mounting, parallel arm and holder/stop arm installation.




- J135 set brush weatherstripping
- Contains 2 jamb pcs & 1 header per set
- Stock available in aluminum. Special order available in dark bronze

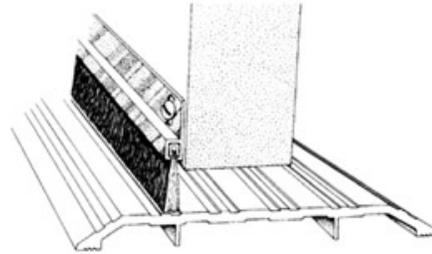

- C380 Door Sweep
- Stock available in aluminum. Special order available in dark bronze

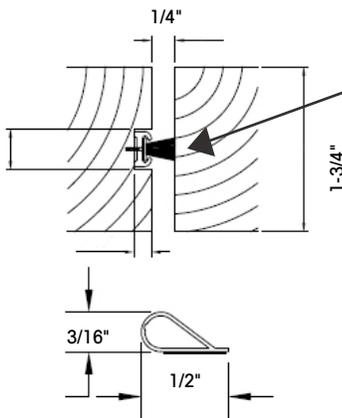


**NGP 136P  
Mortised Astragal:**  
Gray pile, aluminum  
retainer. Can be  
installed in wood or  
fiberglass doors.

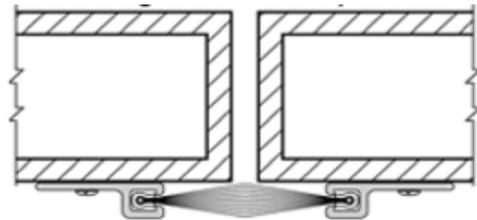

- Smoke seals - PEMKO S88 adhesive mount silicon bulb
- Stock available in black. Special order available in clear, dark bronze, gray, tan & white

- C380 Astragal Sets
- Stock available in aluminum. Special order available in dark bronze

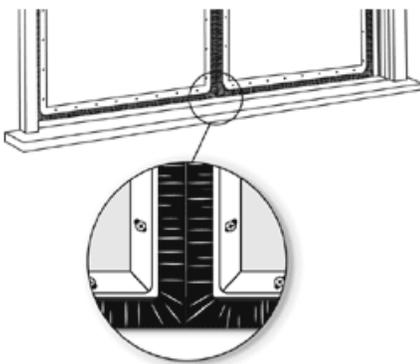

- C380 Astrasweep set
- Contains 2 astragals, 2 sweeps & 2 corner pcs per set
- Stock available in aluminum. Special order available in dark bronze





# HARDWARE

## Sills





### Aluminum sills - 1/4" tall - mill aluminum finish

Available in 36", 48" & 72"





### Aluminum sills - 1/2" tall - mill aluminum finish

Available in 36", 48", 72" & 96"





### Medium duty aluminum sills

Stock available in black. Special order available in clear, dark bronze, gray, tan & white



### Aluminum sills - 1/2" tall - thermal break - mill aluminum finish

Available in 36", 48" & 72"



## Johnson 1500 commercial grade pocket door frame

TESTED QUALITY – Johnson pocket door frames are the only pocket door frames independently tested to ANSI standards. All frames can be cut down to accommodate any small size door.

Easily assembled, structurally strong pocket door frame designed for fast installation in standard 2 x 4 timber or steel frame stud walls typically sheeted with drywall. Versatile frame can be adapted for use in thicker walls or cut down to accept any smaller size door. Removable aluminum track with low friction convex track rails, guaranteed jump proof smooth rolling tricycle hangers, rust resistant zinc plated steel reinforced timber split studs and self adjusting floor anchors.

	DESCRIPTION
PFR	Standard duty pocket door frame 3/0 x 6/8 - max door weight 125 lbs
PFR7HD	Heavy duty pocket door frame 3/0 x 7/0 with 1125 ball bearing rollers - max door weight 200 lbs
PFR8HD	Heavy duty pocket door frame 3/0 x 8/0 with 1125 ball bearing rollers - max door weight 200 lbs
PFR408HD	Heavy duty pocket door frame 4/0 x 8/0 with 1125 ball bearing rollers - max door weight 200 lbs
PCR408HD	1-3/4" Door adaptor kit
JH	Converging door kit



## Barn door kits

Available in Matte Black and Stainless Steel. Size 78-3/4" or 96"

### Kits include:

- 78-3/4" kits - 5 wall spacers and mounting screws / bolts
  - 96" kits include 6 wall spacers and mounting screws / bolts
  - Black finished bolts are used for both bronze & matte black applications
- NOTE: Bolts for 1-3/8" and 1-3/4" doors are included in all standard kits*
- For use with 1-3/8" and 1-3/4" solid core flush, solid core molded and wood doors
  - For single door openings up to 36". Double door applications require 2 kits
  - Solid wood blocking required for drywall installation (wood and mounting screws not included)
  - Kit contains everything needed for concrete wall application
  - Max weight 250 lbs



Bent strap  
Matte black



Straight strap  
Matte black



Top of door strap  
Stainless steel

### Barn door easy clip single soft close kit

Available in Matte Black only



Soft close kit

See residential catalog for complete offering of barn door kits and hardware.

# HARDWARE

## Johnson bifold / bypass hardware

In stock from 3/0 - 8/0.



Maximum panel width: 24"  
Maximum panel height: 108"

Top mount hanger type, commercial grade



Maximum panel width: 24"  
Maximum panel height: 108"

Top mount hanger type, commercial grade



Heavy duty Johnson 138f series for 1-3/8" or  
134f series for 1-3/4"

Maximum track length 16'  
top mount hanger type, commercial grade

### Heavy duty Johnson 111FD series

Finished opening requirements:

2 Leaf set

- Add: 9/16" total combined door width
- Add: 2-3/4" to net door height

4 Leaf set

- Add: 13/16" total combined door width
- Add: 2-3/4" to net door height

### Heavy duty Johnson 110 FD series

Finished opening requirements:

2 Leaf set

- Add: 9/16" total combined door width
- Add: 2-7/8" to net door height

4 Leaf set

- Add: 15/16" total combined door width
- Add: 2-7/8" to net door height

### Bypass slider hardware

Finished opening requirements:

2 Leaf set

- Deduct: 1" total combined door width
- Add: 2-3/8" to net door height

3 Leaf set

- Deduct: 2" total combined door width
- Add: 2-3/8" to net door height

## Hadrian toilet partitions



### Headrail braced toilet partitions

Stock colors: white, almond and light gray


- Pilasters in stock 3'-23'
- Panels in stock from 14" W-70" W x 58" H
- Door sizes from 23"-26" H

*Stainless steel and solid plastic available- Factory order*

### Powder coated solid color



### Powdercoated anti graffiti



### Powdercoated special effects



## ASI washroom accessories



Roll paper towel holder



Paper towel dispenser



Paper towel dispenser/disposal  
2 gallon



Paper towel dispenser/disposal  
13 gallon



Dual napkin disposal  
partition mount



Sanitary napkin  
disposal



Dual toilet tissue  
dispenser



Single toilet  
tissue holder



Double toilet  
tissue holder



Single toilet  
tissue holder



Double toilet  
tissue holder



Single toilet  
tissue holder



Double toilet  
tissue holder



Liquid soap dispenser



Waste receptacle  
7 gallon



Dual napkin / tampon  
dispenser



Horizontal liquid soap  
dispenser



Vertical liquid soap  
dispenser



Counter mount  
all purpose soap  
dispenser



Single robe hook



Double robe hook



Handicap tilt  
frame mirror



Channel frame mirror



Adjustable tilt  
frame mirror

## Cendrex access panels



AHD  
All purpose  
Non-rated

The AHD is designed for a quick and easy installation on non-rated vertical and horizontal surfaces made of dry-wall or any other type of material.



PFN  
Fire-rated  
1-1/2 Hour



The PFN access door is not insulated and can only be used on fire rated walls. It comes with a 1" flange for an easy flush installation on any type of surface material.

PFN fire rated panels are for wall mount ONLY. For ceiling mount PFI panels secure quotation.

### Optional accessories for Cendrex access panels

#### Available by Special Order

Mortise locks for fire rated access panels must be factory installed. Stainless steel is available by special order.



Mortise cam latch  
cylinder optional



Mortise cam latch  
cylinder optional



Cylinder for deadbolt  
or mortise lock



Mortise deadbolt



Screwdriver cam latch



Inside release  
thumbturn for mortise  
deadbolt



Key operated  
cam latch



Gasket



Slam latch

# CUSTOM MILLWORK

## Millwork



### Custom millwork

Refer to our residential catalog for more information



In-stock traditional mouldings



Curved mouldings



Columns



Custom mouldings



Visit [www.ClearyMillwork.com](http://www.ClearyMillwork.com) for product information and details on our complete Residential and Commercial product lines.



**Wholesale Doors**

COMMERCIAL DIVISION

1255B Grand Army Highway | Somerset, MA 02726  
Phone 800-899-4533 fax 508-235-4431

2049 Silas Deane Highway, Suite 1A  
Rocky Hill, CT 06067  
Phone 800-486-7600 fax 800-486-0513

120 Defreest Drive, Suite 19  
(Rensselaer Technology Park) Troy, NY 12180  
Phone 800-350-0448 fax 518-861-5061

44 Green River Way | Watertown, MA 02471  
Phone 800-225-4252 | fax 617-926-6330

[www.ClearyMillwork.com](http://www.ClearyMillwork.com)

