

# HUSKY


## DISAPPEARING STAIRWAY

Selected materials, good workmanship and careful inspection all combine to give you a quality stairway.



Spacer & Runner Construction on Door to Prevent Warpage


Moulded Stair Parts (No Sharp Edges)



Heavy Gauge Spring Arm

Adjustable Spring Tension Feature

Full Width Piano Hinge Mounted Internally for Easy Installation of Trim




Easy "1st Step Out of Attic" Feature

Stringer Reinforcement Bracket

Selected Moulded Stair Parts of Southern Yellow Pine


No Welded Hardware



Heavier Gauge Section Hinge Than Most Competition

Replacement Parts Available

3/16" Ladder Rod Under Each Tread with Ladder Washer

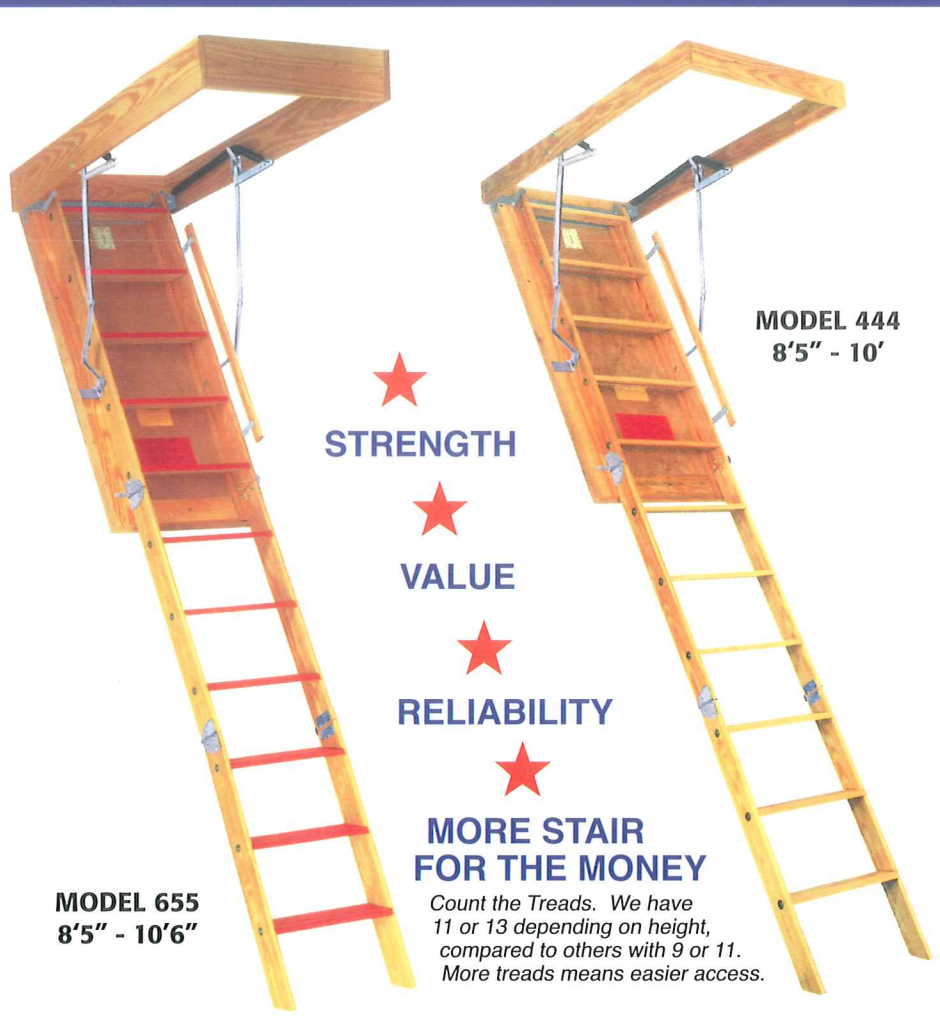

MODEL 655  
8'5" - 10'6"

MODEL 444  
8'5" - 10'

★  
STRENGTH

★  
VALUE

★  
RELIABILITY

★  
MORE STAIR FOR THE MONEY

Count the Treads. We have 11 or 13 depending on height, compared to others with 9 or 11. More treads means easier access.

Insist on Husky Disappearing Stairway



**American Stairways, Inc.**

3807 Lamar Ave. • Memphis, TN 38118

901-795-9200 • FAX 901-795-1253

www.americanstairways.com



# THE SUCCESS OF OUR COMPANY STANDS ON THE QUALITY OF EVERY STAIRWAY WE MAKE.

- ★ Pre-drilled Installation Holes
- ★ Easy First Step Down From Attic for Personal Safety

- ★ 9½" Tread Rise on All Husky Stairs
- ★ More Treads for Easier Access

## Every HUSKY Features:

### Full Width Heavy Duty Piano Hinge

That means far more strength and rigidity than any other type of stairway hinge now in use. Cuts out air leakage at head of stair, and does not interfere with trim carpenter.

### 3/16" Steel Ladder Rod Under Each Tread

Including large washers that keep HUSKY stairs rigid and prevent bending or separation under heavier loads.

### Selected Kiln Dried Southern Pine Lumber

All wood parts selected for density and load bearing capacity.

### Moulded Stringers, Handrail, and Treads

Eased edges practically eliminate splinters and enhance Finished Millwork Appearance.

### Re-inforced Door Panel

### Safety Locknut to Secure Spring Arm to Ladder Section

### Adjustable Spring Tension

### Nuts, Bolts, and Hardware Plated or Painted to Prevent Rust

### Completely Assembled, Ready to Install with Instructions Supplied

## Optional Features

### R-6 Insulation Panel

### Fire Resistant Door & Well Sides

Class A - Flame spread not over 25" in 30 minutes by UL

### Double Section Hinges (Model 655 only)


### Weather Stripping

## There's A Husky That's Right For You. Three Great Models To Choose From!

**MODEL 444:** 1x4 Treads, 1x4 Stringer, 1x4 Frame Rated 250 lbs.

**MODEL 544:** 1x5 Treads, 1x4 Stringer, 1x4 Frame Rated 250 lbs.

**MODEL 655:** 1x6 Treads, 1x5 Stringer, 1x5 Frame Rated 300 lbs.

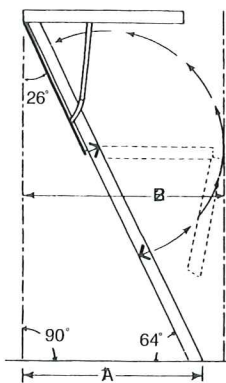

Designed for residential use only.

Rough Opening	Ceiling Height	# of Treads <sup>1</sup>	A Landing Space <sup>2</sup>	B Projection	Available in Models and lbs. per Unit			R-6 Insulation Panel	Fire Resistant Door & Well Sides	Double Section Hinges <sup>3</sup>	Weather Stripping
					444	544	655				
22" X 48"	8'5"	10	56"	60"	54	56	64	Opt.	Opt.	Opt.	Opt.
22" X 54"	8'9"	11	58"	66"	58	60	67	Opt.	Opt.	Opt.	Opt.
22" X 54"	10'	13	65"	79"	63	65	70	Opt.	Opt.	Opt.	Opt.
22" X 60"	9'3"	11	61"	72"	N/A	N/A	70	Opt.	Opt.	Std.	Opt.
22" X 60"	10'6"	13	70"	80"	N/A	N/A	75	Opt.	Opt.	Std.	Opt.
25½" X 48"	8'5"	10	56"	60"	55	60	68	Opt.	Opt.	Opt.	Opt.
25½" X 54"	8'9"	11	58"	66"	62	65	70	Opt.	Opt.	Opt.	Opt.
25½" X 54"	10'	13	65"	79"	66	68	84	Opt.	Opt.	Opt.	Opt.
25½" X 60"	9'3"	11	61"	72"	N/A	N/A	79	Opt.	Opt.	Std.	Opt.
25½" X 60"	10'6"	13	70"	80"	N/A	N/A	84	Opt.	Opt.	Std.	Opt.
30" X 54"	8'9"	11	58"	66"	N/A	N/A	84	Opt.	Opt.	Opt.	Opt.
30" X 54"	10'	13	65"	79"	N/A	N/A	92	Opt.	Opt.	Opt.	Opt.
30" X 60"	8'9"	11	58"	66"	N/A	N/A	94	Opt.	Opt.	Opt.	Opt.
30" X 60"	9'3"	11	61"	72"	N/A	N/A	91	Opt.	Opt.	Std.	Opt.
30" X 60"	10'	13	65"	79"	N/A	N/A	96	Opt.	Opt.	Opt.	Opt.
30" X 60"	10'6"	13	70"	80"	N/A	N/A	96	Opt.	Opt.	Std.	Opt.

1 - Most of the competition has 1 or 2 treads less.

2 - It is recommended adding 18" to the landing space dimensions for safe ascent or descent of the stairway.

3 - Model 655 only, Double section hinges increases the capacity from 300# to 350#.

**JOB TESTED IN OVER A MILLION INSTALLATIONS THROUGHOUT THE NATION AND SEVERAL FOREIGN COUNTRIES.**




3807 Lamar Ave. • Memphis, TN 38118  
 901-795-9200 • FAX 901-795-1253  
[www.americanstairways.com](http://www.americanstairways.com)



# HUSKY ALUMINUM STAIRS

## Strong, Lightweight Aluminum Folding Stairway

- ★ 350# Capacity
- ★ Full Width, Heavy Duty Piano Hinge
- ★ Reinforced Door Panel
- ★ Safety Locknut To Secure Spring Arm To Ladder Section
- ★ Fully Assembled, Ready To Install
- ★ Adjustable Spring Tension
- ★ Adjustable Feet With Rubber Tread
- ★ R-6 Insulation Door Panel: Standard on 1200  
Optional on 800
- ★ Fire Resistant Plywood Door Available
- ★ Weatherstripping Available
- ★ 3/8" Birch Plywood Door Available (Husky 800 Only)

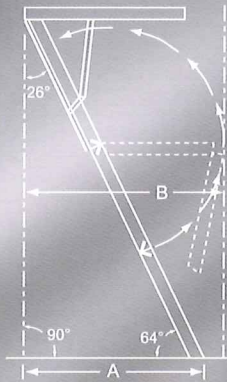

*Designed for residential use only.*

Rough Opening	Ceiling Height	# of Treads	A Landing Space*	B Projection	Weight
<b>Husky 800</b>					
22" x 54"	8'9"	9	58"	66"	58 lbs.
22" x 54"	10'	11	65"	79"	63 lbs.
25.5" x 54"	8'9"	9	58"	66"	62 lbs.
25.5" x 54"	10'	11	65"	79"	66 lbs.
30" x 54"	8'9"	9	59"	66"	67 lbs.
30" x 54"	10'	11	66"	79"	71 lbs.
<b>Husky 1200</b>					
22" x 66"	12'	13	81"	89"	67 lbs.
25.5" x 66"	12'	13	81"	89"	71 lbs.
30" x 66"	12'	13	81"	89"	80 lbs.

\*It is recommended adding 18" to landing space dimensions for safe ascent or descent of the stairway.



MADE IN THE  
**USA**

**NEW!**  
Husky 800  
30" Sizes  
Now Available!

**NEW!**  
Husky 1200  
Now Available!

 **American Stairways, Inc.**

3807 Lamar Ave. • Memphis, TN 38118  
901-795-9200 • FAX 901-795-1253  
[www.americanstairways.com](http://www.americanstairways.com)